




Worksheet #7
***Assessing the Risk of Groundwater Contamination from
Livestock Waste Storage***



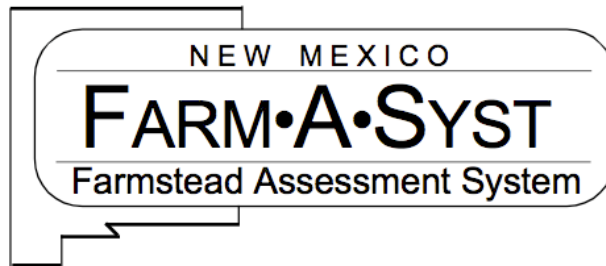

Worksheet #7

Assessing the Risk of Groundwater Contamination from Livestock Waste Storage

Why should I be concerned?

Storing livestock waste allows farmers to spread manure when conditions are right for nutrient use by crops. Accumulating manure in a concentrated area, however, can be risky to the environment and to human and animal health.

Facilities for manure stored in liquid form on the farmstead sometimes leak or burst, releasing large volumes of pollutants. Manure in earthen pits can form a semi-impervious seal of organic matter that does limit leaching potential, but seasonal filling and emptying can cause the seal to break down. Short-term solid manure storage and abandoned storage areas can also be sources of groundwater contamination by nitrates. Manure can contribute nutrients and disease-causing organisms to both surface water and groundwater.

Nitrate levels in drinking water above federal and state drinking water standards of 10 milligrams per liter (mg/l; equivalent to parts per million for water measure) nitrate-nitrogen can pose health problems for infants under 6 months of age, including the condition known as methemoglobinemia (blue baby syndrome). Nitrate can also affect adults, but the evidence is much less certain.

Young livestock are also susceptible to health problems from high nitrate-nitrogen levels. Levels of 20-40 mg/l in the water supply may prove harmful, especially in combination with high levels (1,000 ppm) of nitrate-nitrogen from feed sources.

Fecal bacteria in livestock waste can contaminate groundwater, causing such infectious diseases as dysentery, typhoid and hepatitis. Organic materials that lend an undesirable taste and odor to drinking water are not known to be dangerous to health, but their presence does suggest that other contaminants are flowing into groundwater.

The goal of Farm•A•Syst is to help you protect the groundwater that supplies your drinking water.

How will this worksheet help me protect my drinking water?

- It will take you step by step through your livestock waste storage practices.
- It will rank your activities according to how they might affect the groundwater that provides your drinking water supplies.
- It will provide you with easy-to-understand rankings that will help you analyze the “risk level” of your livestock waste storage practices.
- It will help you determine which of your practices are reasonably safe and effective, and which practices might require modification to better protect your drinking water.

How do I complete the worksheet?

Follow the directions at the top of the chart on the next page. It should take you about 15-30 minutes to complete this worksheet and figure out your ranking.

Information derived from Farm•A•Syst worksheets is intended only to provide general information and recommendations to farmers regarding their own farmstead practices. It is not the intent of this educational program to keep records of individual results.

Glossary

Livestock Waste Storage

These terms may help you make more accurate assessments when completing Worksheet #7. They may also help clarify some of the terms used in Fact Sheet #7.

Concrete stave storage: A type of liquid-tight animal waste storage structure. Located on a concrete pad, it consists of concrete panels bound together with cable or bolts and sealed between panels.

Earthen basin or pit: Clay-lined manure storage facility constructed according to specific engineering standards. Not simply an excavation.

Engineering standards: Design and construction standards available at Soil Conservation Service (SCS) offices. These standards may come from SCS technical guides, state regulations or land grant university engineering handbooks.

Filter strip: A gently sloping grass plot used to filter runoff from the livestock yard and some types of solid manure storage systems. Influent waste is distributed uniformly across the high end of the strip and allowed to flow down the slope. Nutrients and suspended material remaining in the runoff water are filtered through the grass, absorbed by the soil and ultimately taken up by plants. Filter strips must be designed and sized to match the characteristics of the livestock yard or storage system.

Glass-lined steel storage: A type of liquid-tight, above-ground animal waste storage structure. Located on a concrete pad, it consists of steel panels bolted together and coated inside and outside with glass to provide corrosion protection.

Poured concrete storage: A type of liquid-tight animal waste storage structure. Located on a concrete pad, it consists of poured concrete reinforced with steel.

Water table depth: Depth to the upper surface of groundwater. This depth is sometimes indicated in the county soil survey, but this varies from county to county. This information may be available from your well construction report or from hydrogeological reports and groundwater flow maps of your area. Your county Extension agent or SCS specialist may also be able to help you gather this information.

There are two types of water table: (1) the water table typically noted in a well log as an indication of usable water supply; and (2) the seasonal high water table. The seasonal high water table is most important in regard to construction of livestock manure storage facilities, because it may present facility construction problems.

Livestock Waste Storage: Assessing Drinking Water Contamination Risk

1. Use a pencil. You may want to make changes.
2. For each category listed on the left that is appropriate to your farmstead, read across to the right and circle the statement that **best** describes conditions on your farmstead. (Skip and leave blank any categories that don't apply to your farmstead.) For categories separated by "OR," choose only one category.

3. Then look above the description you circled to find your "rank number" (4, 3, 2 or 1) and enter that number in the blank under "your rank."
4. Directions on overall scoring appear at the end of the worksheet.
5. Allow about 15-30 minutes to complete the worksheet and figure out your risk ranking for livestock waste storage practices.

YOUR RANK

RANK 4

RANK 3

RANK 2

RANK 1

LONG-TERM STORAGE (180 days or more)

Steel, glass-lined (liquid-tight design, above ground)

Designed and installed according to accepted engineering standards and specifications. Properly maintained.

Designed and installed according to accepted engineering standards and specifications. Not maintained.

Leaking tank on medium-textured soils (silt loam, loam).

Leaking tank on coarse-textured soils (sands, sandy loam). Water table or fractured bedrock shallower than 20 feet.

OR

Concrete stave (liquid-tight design)

Designed and installed according to accepted engineering standards and specifications. Properly maintained.

Designed and installed according to accepted engineering standards and specifications. Not maintained.

Concrete cracked, medium-textured soils (silt loam, loam). Water table deeper than 20 feet.

Concrete cracked, coarse-textured soils (sands, sandy loam). Water table or fractured bedrock shallower than 20 feet.

OR

Poured concrete (liquid-tight design)

Designed and installed according to accepted standards and specifications. Properly maintained.

Designed and installed according to accepted engineering standards and specifications. Not maintained.

Concrete cracked, medium-textured soils (silt loam, loam). Water table deeper than 20 feet.

Concrete cracked, coarse-textured soils (sands, sandy loam). Water table or fractured bedrock shallower than 20 feet.

OR

Earthen waste storage pit (below ground)

Designed and installed according to accepted engineering standards and specifications. Properly maintained.

Not designed to engineering standards. Constructed in medium- or fine-textured dense materials (silt loam, loam, clay loams, silty clay). Water table deeper than 20 feet. Earthen lining eroding.

Not designed to engineering standards. Constructed in coarse-textured materials (sands, sandy loam). Fractured bedrock or water table shallower than 20 feet. More than 10 years old. Earthen lining perforated.

	RANK 4	RANK 3	RANK 2	RANK 1	YOUR RANK
SHORT-TERM STORAGE (usually 30-90 days; in some cases, up to 180 days)					
Stacked in field (on soil base)	_____	_____	Stacked on high ground. Medium- or fine-textured soils (silt loam, loam, clay loams, silty clay). Water table is deeper than 20 feet.	Stacked on high ground. Coarse-textured soils (sands, sandy loam). Fractured bedrock or water table shallower than 20 feet.	_____
Stacked in yard	Covered concrete yard with curbs, gutters and settling basin.	Concrete yard with curbs and gutters. Grass filter strips installed and maintained.	Earthen yard with medium- or fine-textured soils (silt loam, loam, clay loams, silty clay). Water table deeper than 20 feet.	Earthen yard with coarse-textured soils (sands, sandy loam). Fractured bedrock or water table shallower than 20 feet.	_____
Water-tight structure designed to accepted engineering standards and specifications	Designed and installed according to engineering standards. All liquids retained.	Designed and installed according to engineering standards on medium- and fine-textured soils (silt loam, loam, clay loams, silty clay). Water table deeper than 20 feet.	Designed and installed according to engineering standards on coarse-textured soils (sands, sandy loam). Water table or fractured bedrock shallower than 20 feet.	Designed and installed according to engineering standards. Not properly maintained. Water treatment and diversion and terrace structures allowed to deteriorate.	_____
Stacked in open housing	Building has concrete floor, protected from surface water runoff. Adequate bedding provided.	Building has earthen or concrete floor on medium- or fine-textured soils (silt loam, loam, clay loams, silty clay), protected from surface water runoff. Water table deeper than 20 feet.	Building has earthen or concrete floor on medium- or fine-textured soils (silt loam, loam, clay loams, silty clay), subject to surface water runoff. Water table or fractured bedrock shallower than 20 feet.	Building has earthen floor on coarse-textured soils (sands, sandy loam), subject to surface water runoff. Water table or fractured bedrock shallower than 20 feet.	_____

	RANK 4	RANK 3	RANK 2	RANK 1	YOUR RANK
LOCATION					
Location of livestock waste storage in relation to drinking water well	Manure stack or earthen waste storage pit more than 250 feet downslope from well. Manure storage structure (liquid tight) more than 100 feet downslope from well.	Manure stack or earthen waste storage pit more than 250 feet upslope from well. Manure storage structure (liquid tight) more than 100 feet upslope from well.	Manure stack or earthen waste storage pit less than 250 feet downslope from well. Manure storage structure (liquid tight) less than 100 feet* downslope from well.	Manure stack or earthen waste storage pit less than 250 feet upslope from well. Manure storage structure (liquid tight) less than 100 feet* upslope from well.	_____

Boldface type: Besides representing a higher-risk choice, this practice also violates New Mexico law.
 * Illegal for new construction. Existing wells must meet separation distances in effect at time of construction.

TOTAL

Use this total to calculate risk ranking on back page of worksheet.

What do I do with these rankings?

Step 1: Begin by determining your overall livestock waste risk ranking. Total the rankings for the categories you completed and divide by the number of categories you ranked:

$\frac{\text{_____}}{\text{total of rankings}} \text{ divided by } \frac{\text{_____}}{\text{\# of categories ranked}} \text{ equals } \boxed{\text{_____}}^*$	*Carry your answer out to one decimal place.
--	--

3.6–4=low risk 2.6–3.5=low to moderate risk 1.6–2.5=moderate to high risk 1–1.5=high risk

This ranking gives you an idea of how your livestock waste practices **as a whole** might be affecting your drinking water. This ranking should serve only as a **very general guide, not a precise diagnosis**. Because it represents an **averaging** of many individual rankings, it can mask any **individual** rankings (such as 1's or 2's) that should be of concern. (See Step 2.)

Enter your boxed livestock waste risk ranking on page W12.1 of Worksheet #12. Later you will compare this risk ranking with other farmstead management rankings. Worksheet #11 will help you identify your farmstead's site conditions (soil type, soil depth and bedrock characteristics), and Worksheet #12 will show you how these site conditions affect your risk rankings.

Step 2: Look over your rankings for individual activities:

- **Low-risk** practices (4's): ideal; should be your goal despite cost and effort
- **Low-to-moderate-risk** practices (3's): provide reasonable groundwater protection
- **Moderate-to-high-risk** practices (2's): inadequate protection in many circumstances
- **High-risk** practices (1's): inadequate; pose a high risk of polluting groundwater

Regardless of your overall risk ranking, any individual rankings of "1" require immediate attention. Some concerns you can take care of right away; others could be major—or costly—projects, requiring planning and prioritizing before you take action.

Find any activities that you identified as 1's and list them under "High-Risk Activities" on pages W12.6-W12.7 of Worksheet #12.

Step 3: Read Fact Sheet #7, *Improving Livestock Waste Storage*, and consider how you might modify your farmstead practices to better protect your drinking water.